

BGS-007Pro-8CH-DF-WG-DR

Dual frequency eight channel anti-interference terminal

product specification



Proposed/Date: _____

Review/Date: _____

Ratification/date: _____

catalogue

■ Product presentation	1
■ Product function	1
■ Behaviour of electricity	2
■ Interface definition	3
■ Shape and structure	3
■ Product identification	4
■ Environmental suitability	5
■ Typical application scenarios	5
■ Connection relationship description	5
■ Installation and use	6
■ Connect with flight control protocol	7
■ Disclaimer	7

■ Product presentation

The model of this product is BGS-007Pro-8CH-DF-WG-DR:dual frequency 8-channel anti-interference, which serves the field of reliable navigation such as UAV and unmanned vehicle, protects the user terminal from all kinds of unintentional interference and malicious attacks, and greatly improves the PNT information security.

■ Product function

- 1. This product is dual frequency 8 channel anti interference.**
- 2. The main working frequency is B1L1, and the second frequency point can be configured.**

3. Anti-interference function

It can suppress narrowband interference, broadband interference, pulse interference, frequency sweeping interference, Gaussian interference and other suppressive interference

- 4. Built-in full frequency point navigation and positioning module, output information according to NMEA0183 protocol.**

- 5. Serial port output or RF port output can be used.**

6. Software upgrade

It has the function of software upgrade, which can be upgraded through serial port interference fighting module and receiver module

7. System self-inspection

It has self-inspection and status inspection functions

8. Fire resistance function

The anti-continuous wave power shall not be less than 10W

9. Safety

Overvoltage protection, reverse connection protection and so on

■ Behaviour of electricity

1. Working frequency

BDS-B1: 1561.098MHz

GPS-L1: 1575.42MHz

2. Anti-interference performance

Unidirectional interference: ≥ 95 dB, Three-direction interference: ≥ 85 dB

3. Positioning accuracy

Horizontal ≤ 1.5 meters

4. Speed measurement accuracy

≤ 0.2 meters/s

5. Timing accuracy

≤ 100 ns

6. Working voltage

Input voltage 5~17V

7. Power consumption

≤ 10W

■ Interface definition

1. Power/data interface

The J30J-9ZK core connector is selected, and the pin is defined as follows:

No.	name	direction	electrical level	remarks
1	Positive pole	import	5~17V	Recommended 12V
2	Positive pole	import	5~17V	Recommended 12V
3	Negative pole	import		
4	Negative pole	import		
5	RXD0	import	TTL	Upgrade to serial port
6	TXD0	output	TTL	
7	RXD1	output	TTL	Anti-interference serial port
8	TXD1	import	TTL	
9	GND	import	TTL	


2. RF interface

- 1) Anti-interference signal output interface, using SMA connector, and in the form of one line
- 2) The signal level of output B1\L1 is -70 to -60dBm

■ Shape and structure

1. Appearance size

130mm×135mm× 38 mm

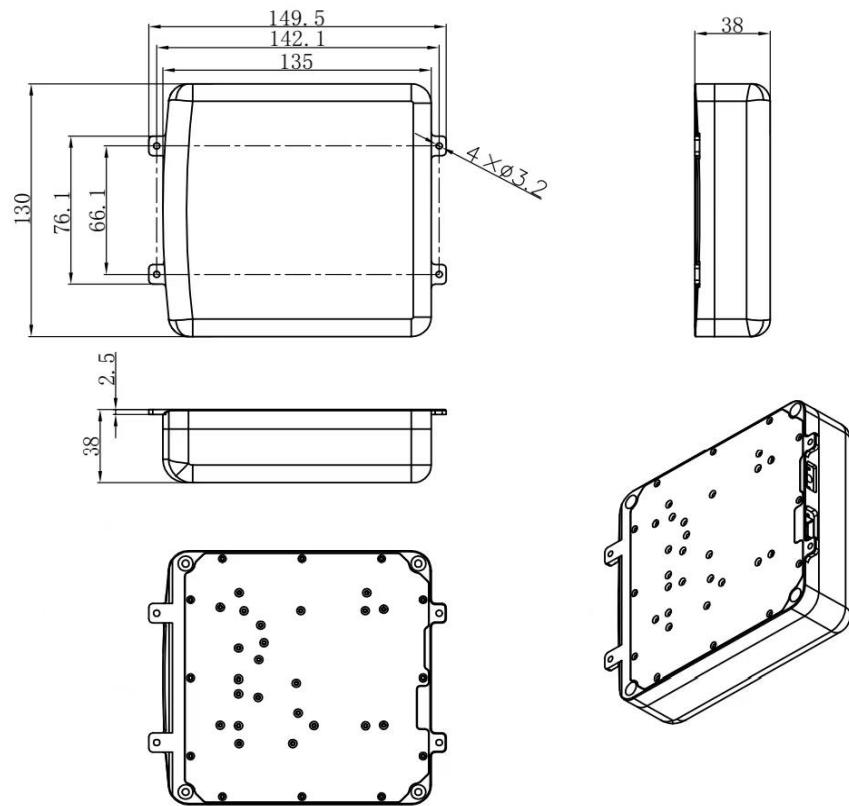

2. Weight

$\leq 400\text{g}$

3. Color

French grey

■ Product identification

product name:
product model:
serial number:
date of manufacture:
manufacturer:

■ Environmental suitability

1. Operating temperature:

-40°C~+55°C

2. Storage temperature:

-55°C~+70°C

3. Relative humidity:

Temperature 40°C; humidity: 96%

4. Rain:


Satisfy the GJB150A rain test requirements

■ Typical application scenarios


1. Time synchronization security in power, communications and finance
2. Navigation safety for drones, unmanned cars and unmanned ships
3. Vehicle defense navigation safety
4. High-end logistics navigation safety

■ Connection relationship description

1. The electrical signal connection between the product and the platform carrier is connected by low frequency data method.
2. The product has a built-in locator that can replace the conventional positioning terminal and antenna. As shown in the figure below:

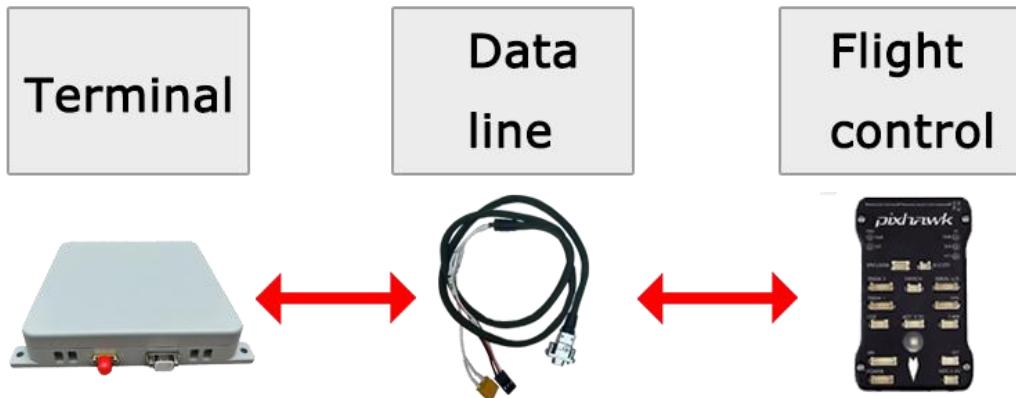

3. In RF signal access mode, this product replaces the conventional active antenna. When connecting using the RF interface of this product, please ensure that the interface of the connected party does not provide more than 5V power to this product to avoid possible power conflicts or damage. As shown in the following diagram.

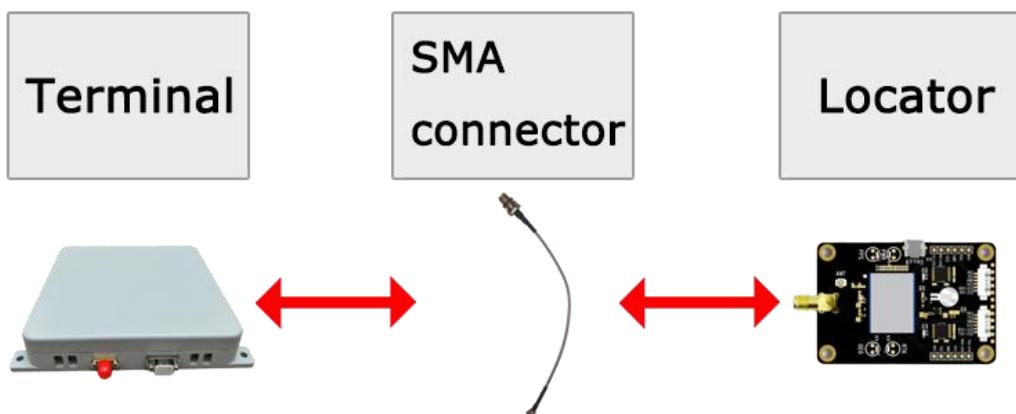

4. When using the USB to TTL tool to connect with the computer, do not plug or unplug the USB with power to avoid damaging the serial port.

■ Installation and use

1. fixed

Use M3 screws for installation and fixation.

2. supply electricity

Use XT30 power supply, power voltage 5-17V, maximum not more than 17V, it is recommended to use 12V.

3. Position data connection

- 1) Connect the DuPont line TTL serial port of this product to the GNSS serial port of the flight control.

Use the accompanying data cable provided with this product to connect to the GNSS serial port of the flight controller. Connect one end of the data cable labeled as TX to the RX interface of the flight controller, the other end labeled as RX to the TX interface of the flight controller, and the last end labeled as GND to the GND interface of the flight controller.

- 2) Use SMA connection cable to connect the RF port of the product to the antenna port of the rone locator.

Note: Either serial port or RF port is sufficient.

■ Connect with flight control protocol

This product outputs nmea 0183 protocol.

■ Disclaimer

This product is designed to enhance the safety of satellite navigation. Please comply with relevant laws and regulations when using this product. Any illegal activities carried out using this product are not related to this product.