


Product Number: BGS-AN0433-20600G

Product Name: 433MHZ 3.5dBi Omnidirectional Fiberglass Antenna



1. Specification

Sample Photo	
	
A. Electrical Characteristics	
Frequency	433MHz
Impedance	50 Ohm
S.W.R.	<1.5
Antenna Gain	3dBi
Efficiency	≈84%
Polarization	Linear
Horizontal Beamwidth	360°
Vertical Beamwidth	61-75°
Max Power	50W
B. Material & Mechanical Characteristics	
Connector Type	N connector
Dimension	Φ 20*350mm
Weight	0.145Kg
Radome material	Fiberglass
C. Environmental	
Operation Temperature	- 40 °C ~ + 80 °C
Storage Temperature	- 40 °C ~ + 80 °C
Rated Wind Velocity	36.9m/s
Lighting Protection	DC Ground

Product Number: BGS-AN0433-20600G

Product Name: 433MHz 3.5dBi Omnidirectional Fiberglass Antenna








Test Equipment & Conditions

1. Network Analyzer: Keysight E5071C

2. 3D Chamber Test System

- .Chamber Size: 9 x 5 x 4 m³
- .Freq. Range: 0.4 ~ 18.0 GHz
- .Double Ridge Horn Antenna
- .VNA: Agilent E5071C
- .3D Turning Table and Positioner
- .ADT Solution 3D Testing Software

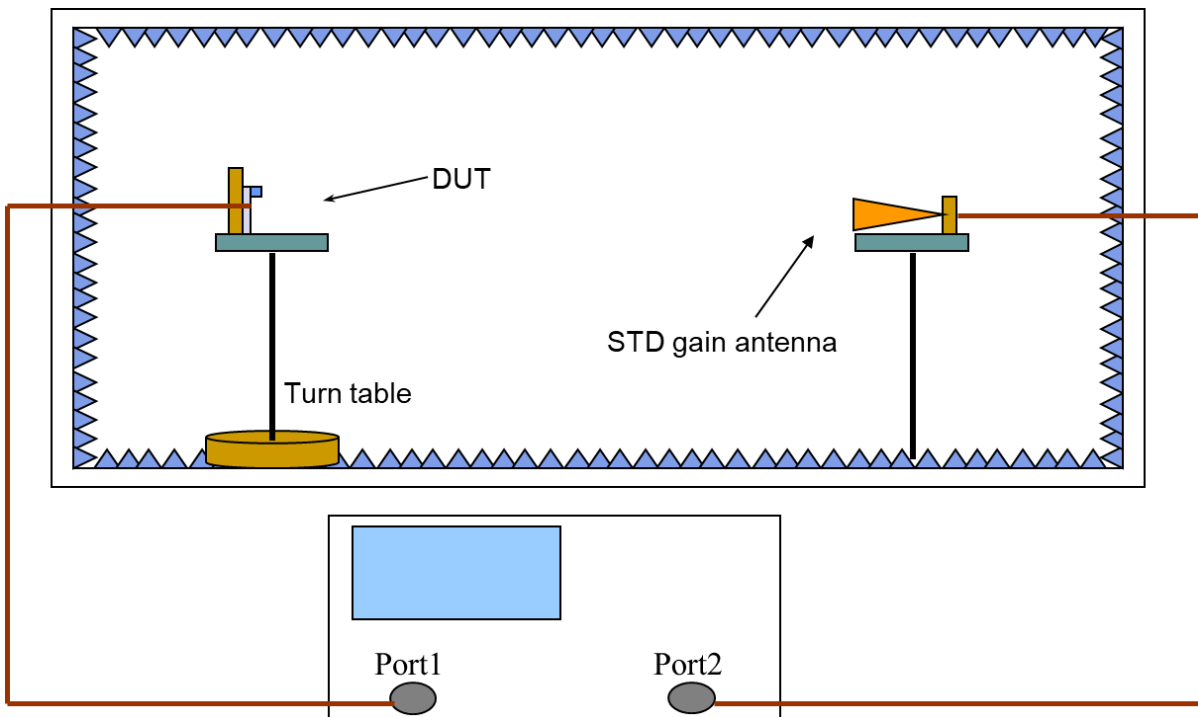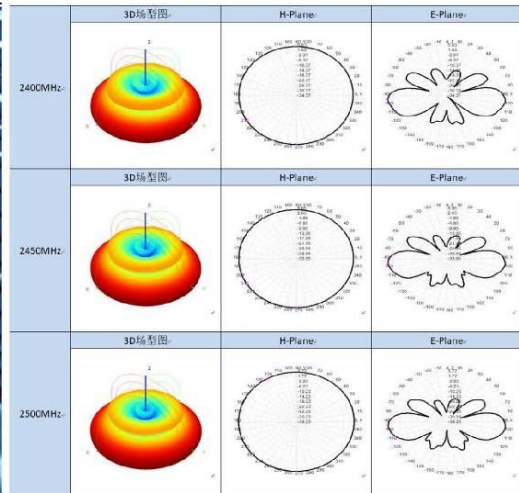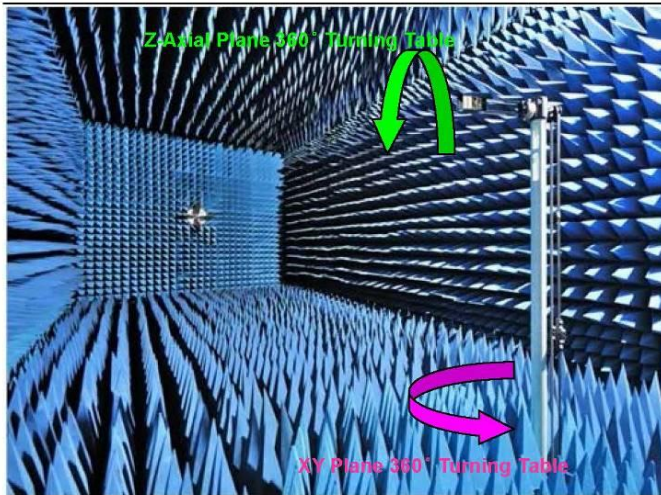


Product Number: BGS-AN0433-20600G

Product Name: 433MHz 3.5dBi Omnidirectional Fiberglass Antenna

2. Antenna - S Parameter Test Data

2.1. VSWR

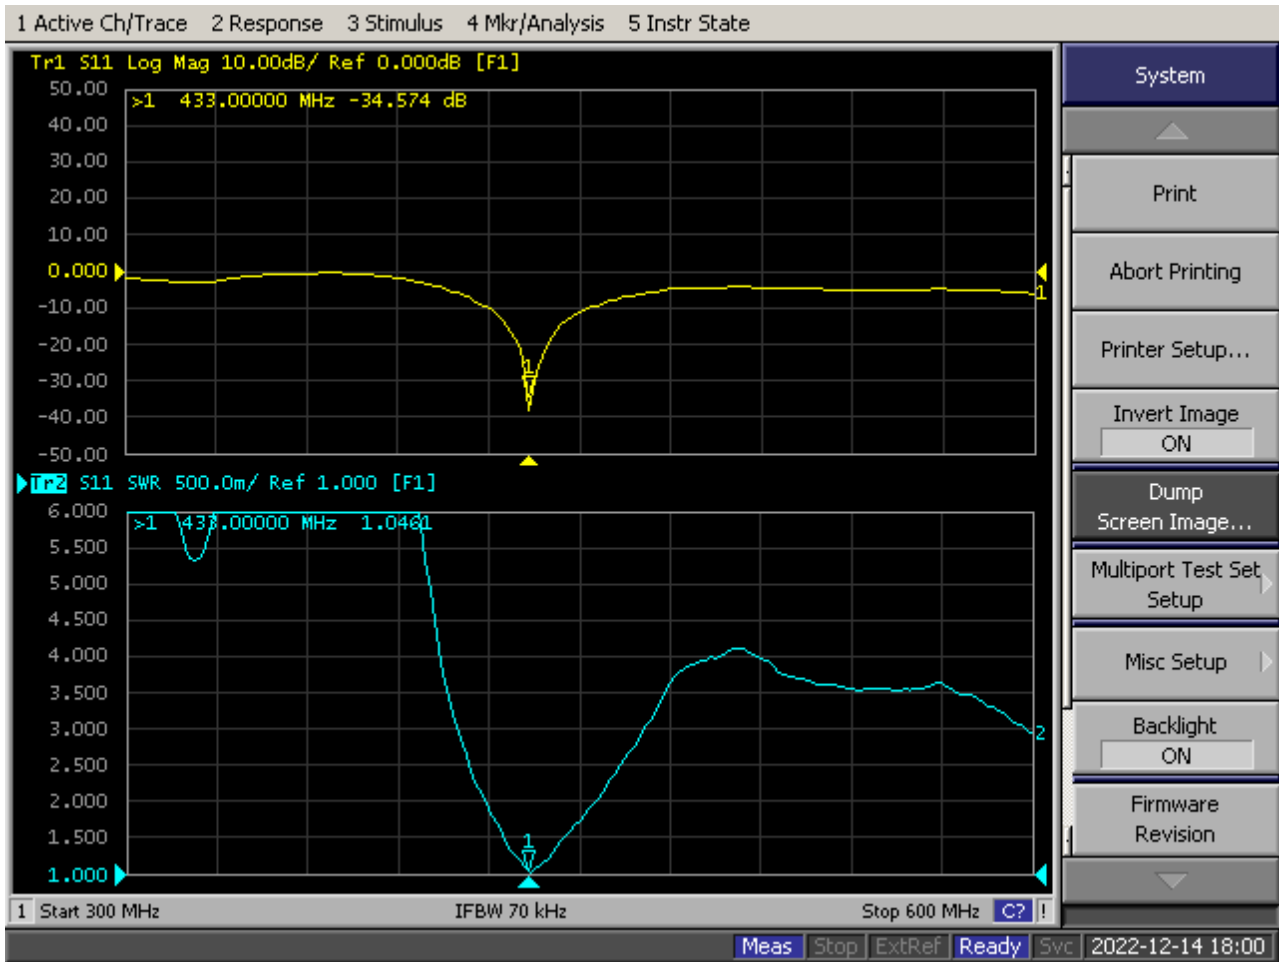


Product Number: BGS-AN0433-20600G

Product Name: 433MHZ 3.5dBi Omnidirectional Fiberglass Antenna

2.2. Total Efficiency & Gain:

Frequency (MHz)	428.0	429.0	430.0	431.0	432.0	433.0	434.0	435.0
Gain (dBi)	3.01	3.06	3.09	3.08	3.04	3.00	2.95	2.90
Efficiency (%)	83.76	84.77	85.52	85.76	85.65	85.32	84.88	84.42

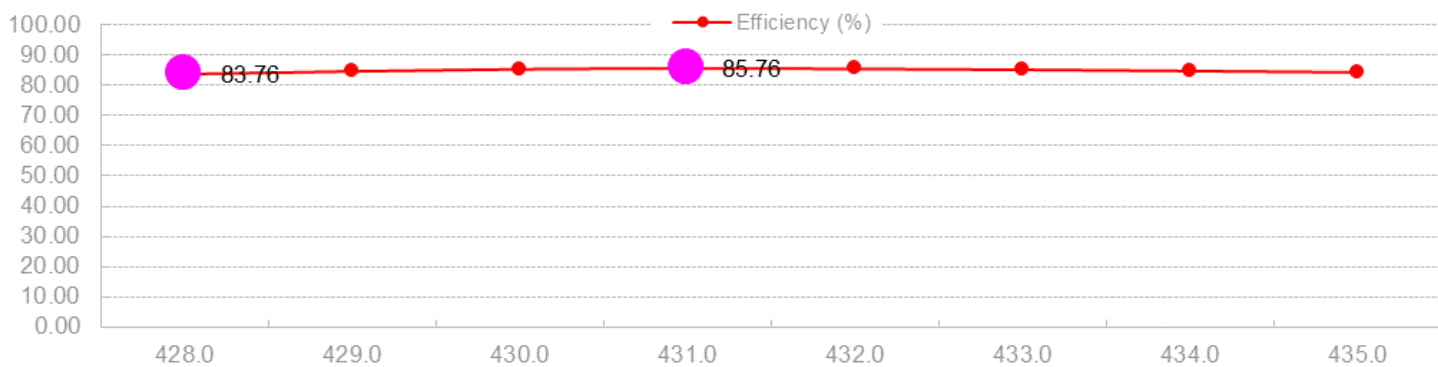

2.3 Radiation Pattern

	3D	2D-Horizontal	2D-Vertical
428MHz			
433MHz			
435MHz			

Product Number: BGS-AN0433-20600G

Product Name: 433MHz 3.5dBi Omnidirectional Fiberglass Antenna

3. Mechanical Drawing

