




Product Number: BGS-AN2458-1495G-L
Product Name: WIFI Dual Band Antenna

1. Specification






Sample Photo		
		
A. Electrical Characteristics		
Frequency	2400-2500MHz	5150-5850MHz
S.W.R.	≤ 1.5	≤ 2.0
Antenna Gain	2.5dBi	4dBi
Efficiency	$\approx 63\%$	$\approx 58\%$
Polarization	Linear	Linear
Horizontal Beamwidth	360°	360°
Vertical Beamwidth	40-70°	16-37°
Impedance	50 Ohm	50 Ohm
Max Power	50W	50W
B. Material & Mechanical Characteristics		
Cable Type	RF1.13 Cable	
Connector Type	MHF1 Plug	
Dimension	13.5*95mm	
Weight	0.003Kg	
C. Environmental		
Operation Temperature	- 40 °C ~ + 65 °C	
Storage Temperature	- 40 °C ~ + 80 °C	

Test Equipment & Conditions

1. Network Analyzer: Keysight E5071C

2. 3D Chamber Test System

- .Chamber Size: 9 x 5 x 4 m³
- .Freq. Range: 0.4 ~ 18.0 GHz
- .Double Ridge Horn Antenna
- .VNA: Agilent E5071C
- .3D Turning Table and Positioner
- .ADT Solution 3D Testing Software

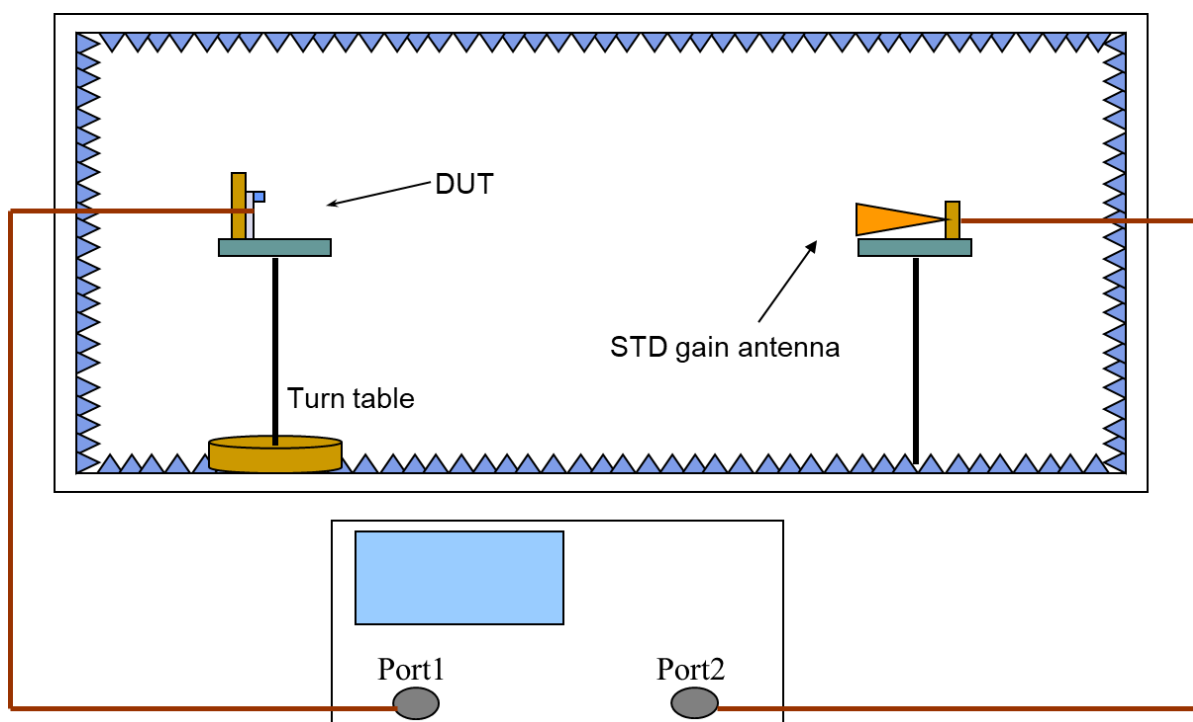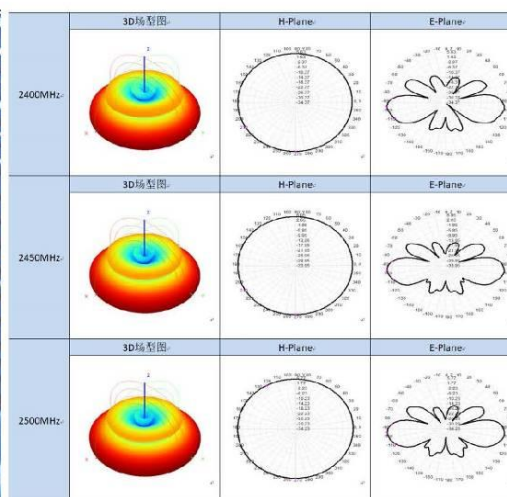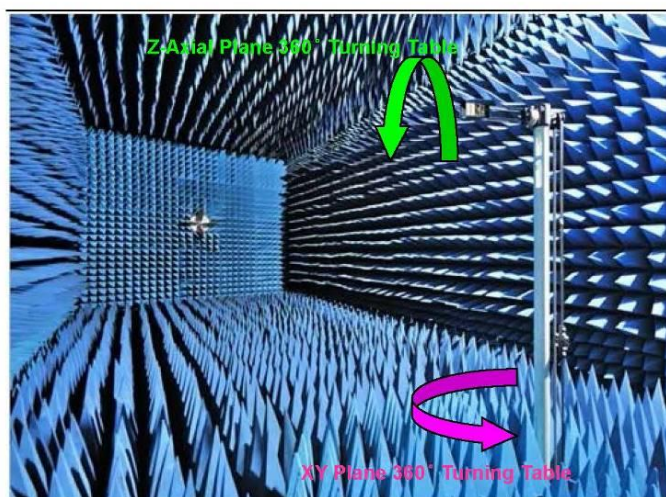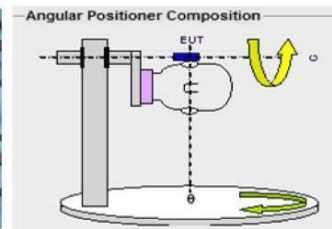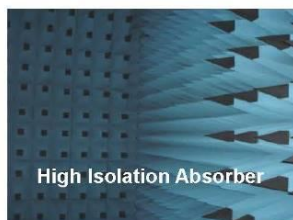



Product Number: BGS-AN2458-1495G-L
Product Name: WIFI Dual Band Antenna


2. Antenna - S Parameter Test Data

2.1. VSWR

E5063A Network Analyzer

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Resize

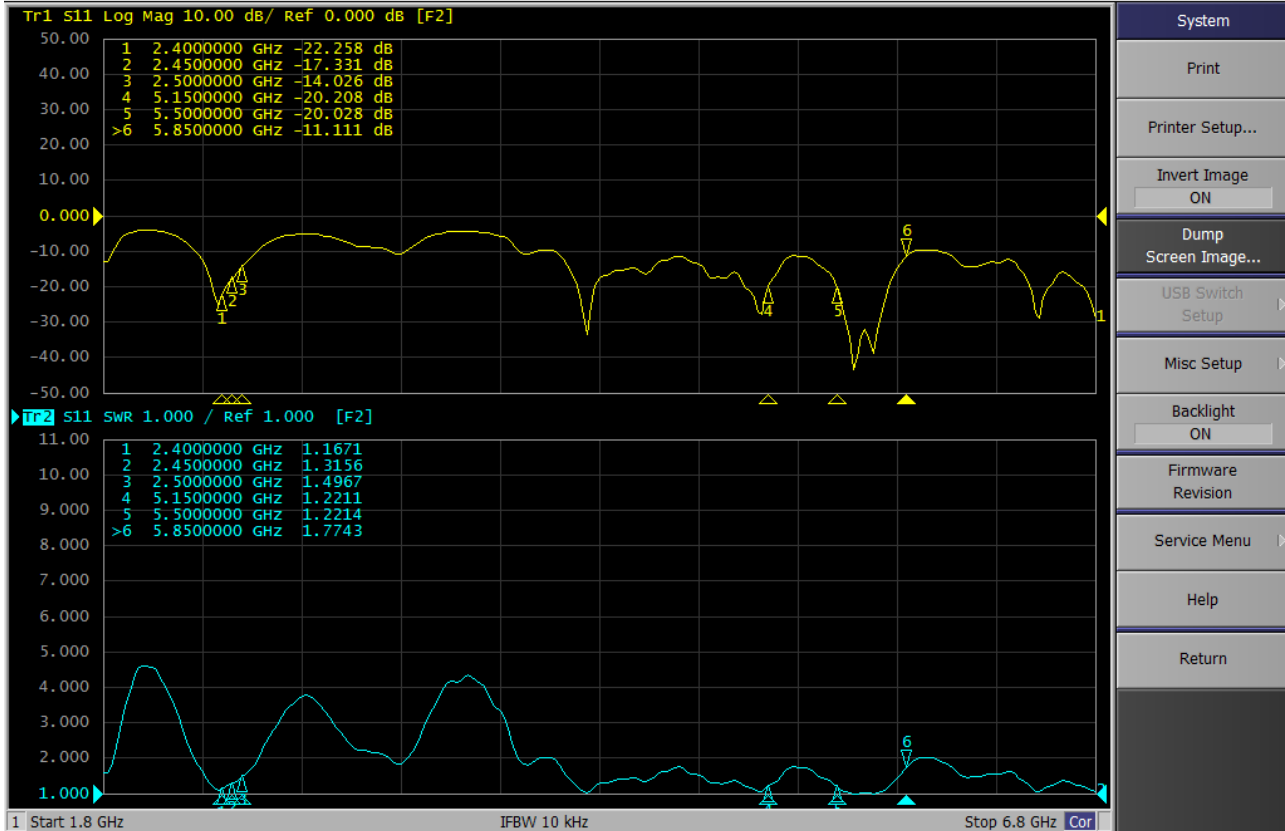



2.2. Total Efficiency& Gain:

Frequency (MHz)	Gain (dBi)	Efficiency (%)
2400	2.6	68.3
2410	2.3	65.3
2420	2.1	62.9
2430	2.0	62.3
2440	2.0	62.1
2450	1.8	62.9
2460	1.9	64.1
2470	1.9	64.4
2480	1.5	60.5
2490	1.3	58.8
2500	1.3	60.1
5150	4.2	56.6
5200	4.1	54.7
5250	4.0	54.4
5300	4.4	57.9
5350	4.2	55.9
5400	3.9	52.7
5450	4.0	54.7
5500	4.1	56.3
5550	3.9	57.3
5600	3.6	57.4
5650	3.4	59.2
5700	3.2	59.7
5750	3.2	64.0
5800	2.7	65.1
5850	2.4	62.9



Product Number: BGS-AN2458-1495G-L
 Product Name: WIFI Dual Band Antenna

2.3 Radiation Pattern

2.4G	3D	2D-水平面	2D-垂直面
2400M Hz			
2450M Hz			
2500M Hz			



5.8G	3D	2D-水平面	2D-垂直面
5150M Hz			
5500M Hz			
5850M Hz			



Product Number: BGS-AN2458-1495G-L
 Product Name: WIFI Dual Band Antenna

3. Mechanical Drawing

